

Appeal Of Gracious surfaces & detail



Size:

600×600mm



The pattern of this surface creates a symmetry that complements the ambiance and make them extraordinary.





ELEGENT SERIES



Step into a realm of refined luxury with Elegance series tiles, where every step is a testament to impeccable taste and elegance.

SUPERIOR FEATURES OF DIGITAL FULLBODY TILES

The SyncStone Collection features strength and resilience redefining features ideal to stand against the modern lifestyle usage and atrocities of everyday use.



SOLID BODY

Durable and solid body due to the homogenous fullbody composition of the tiles.



ZERO MAINTENANCE

The surfaces are sturdy and resilient requiring no special maintenance.



EASY TO CLEAN

Resists stains, scratches, and more requiring effortless regular cleaning only.



HIGH STRENGTH

The fullbody composition boasts high strength and resistance ideal for high traffic also.



ECOLOGICAL & SUSTAINABLE

The collection is a sustainable alternative to marble flooring making it ecological.



LOW WATER ABSORPTION

Exceptionally nonporous surface and revolutionary digital print make surface low water absorbing. Explore extensive application indoors and outdoors with the aesthetic and resilient qualities of the exclusive collection.

APLLICATION AREA



KITCHEN

LIVING ROOM



CORPORATE OFFICES

HOTEL & RESTOURANTS





BATHROOM

PUBLIC PLACE






AMAZONITE

Size: 600x600mm

Finish: GLOSSY

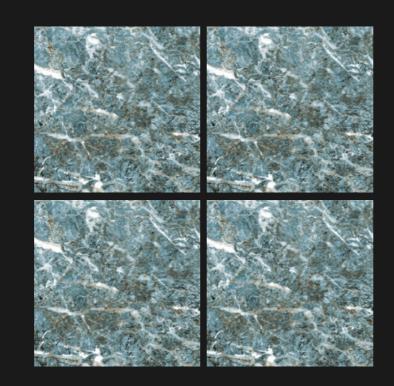






























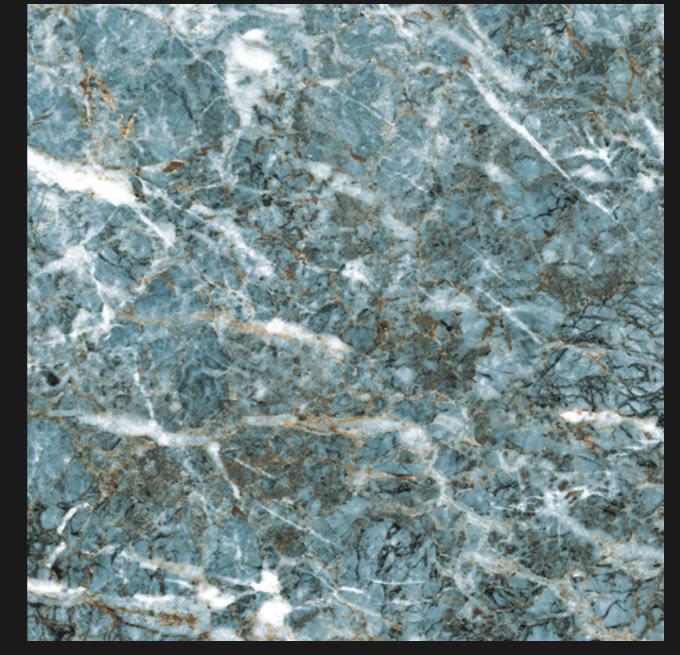





AMZONIT AQUA

Size: 600x600mm

Finish: GLOSSY




















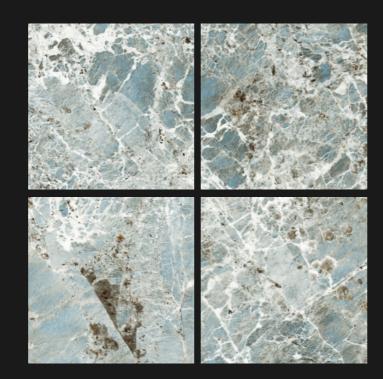







AQUA ART

Size : **600x600mm**

Finish: GLOSSY

FEATURES



EASY



DIMENSIONAL STABILITY



HIGH STRENGTH



WATER RESISTANT



CHEMICAL RESISTANT








FIRE RESISTANT









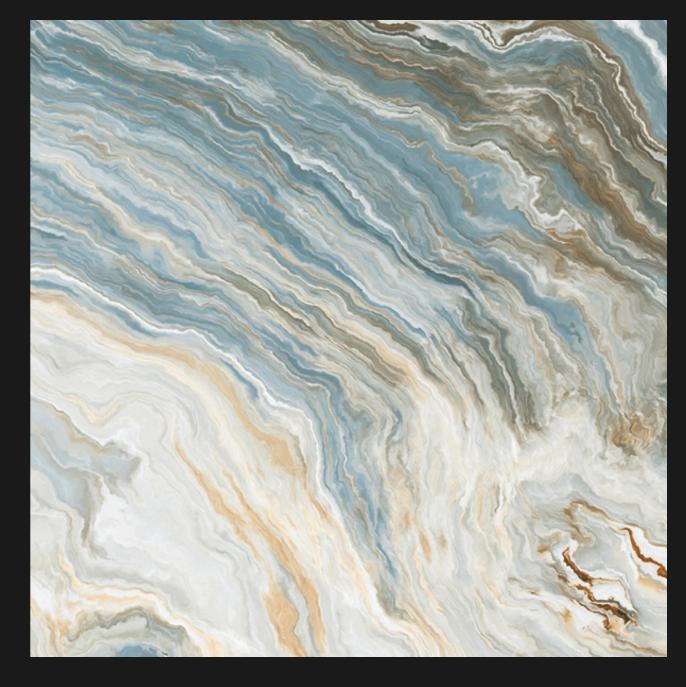





ARISTOC BLUE

Size: 600x600mm

Finish: GLOSSY

FEATURES



















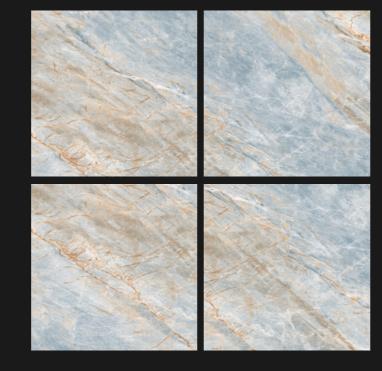

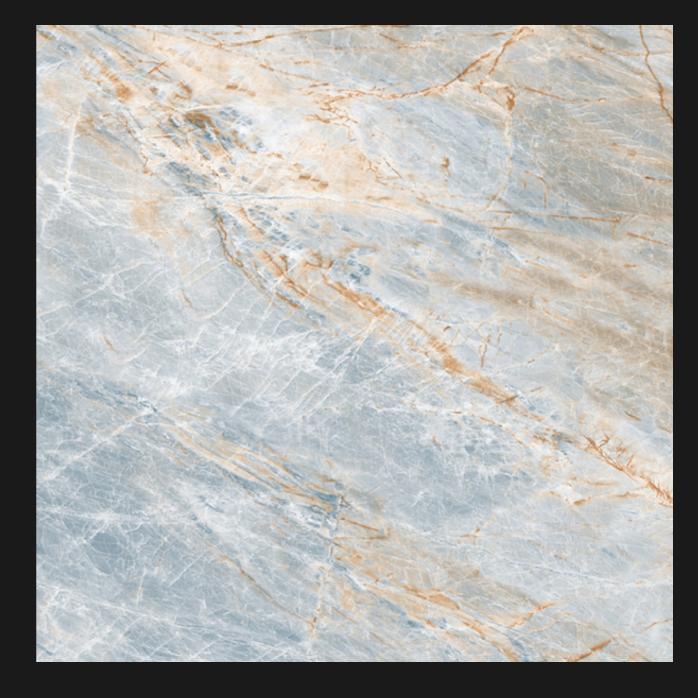



AROTIC BLUE

Size : **600x600mm**

Finish: GLOSSY

FEATURES




























ARTIC SATVARIOT

Size: 600x600mm

Finish: GLOSSY

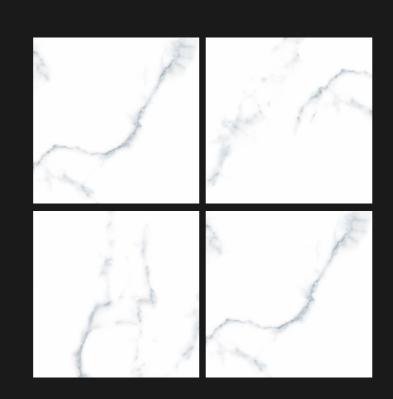































ASPIER BLUE

Size : **600x600mm**

Finish: GLOSSY

FEATURES
























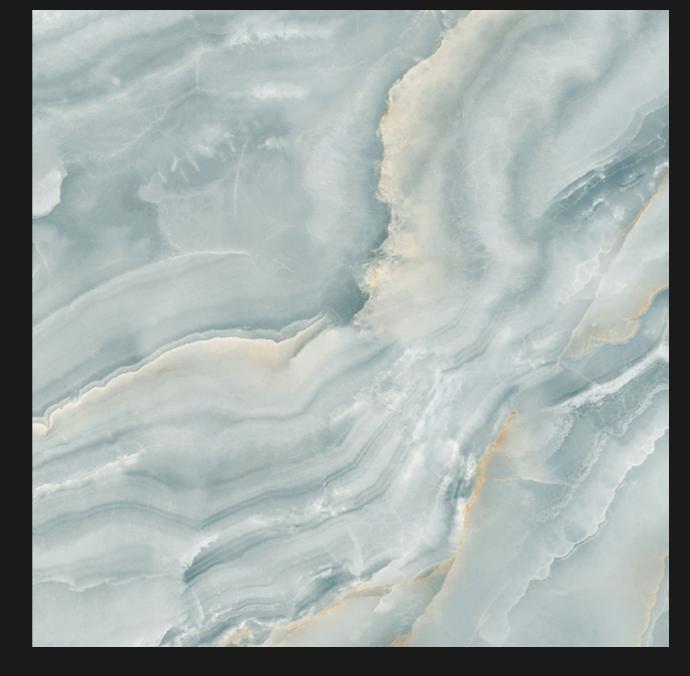





CLOUDY GREEN

Size: 600x600mm

Finish: GLOSSY



















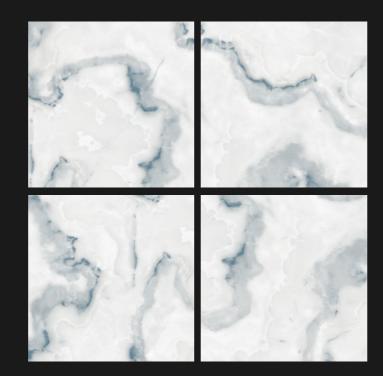



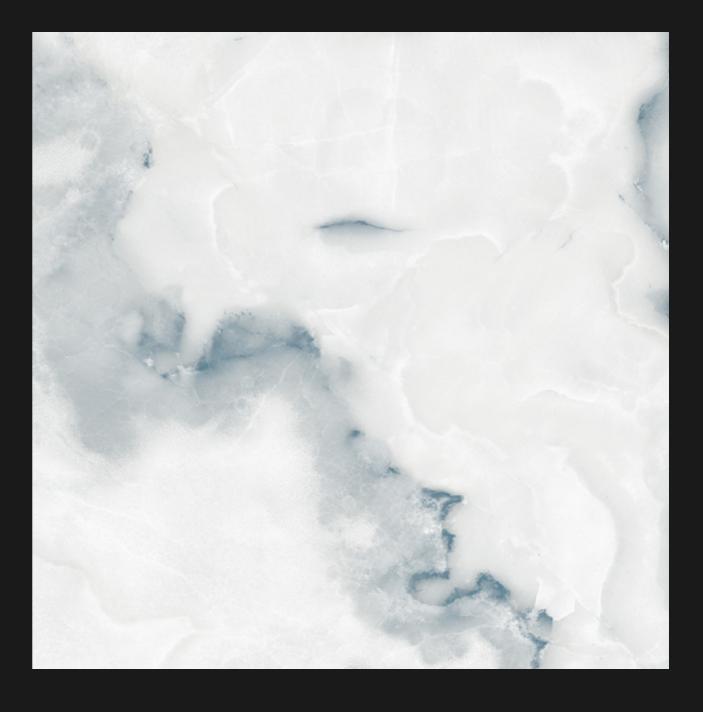



CP-5097

Size: 600x600mm

Finish: GLOSSY





CHEMICAL RESISTANT





IMPACT RESISTANCE












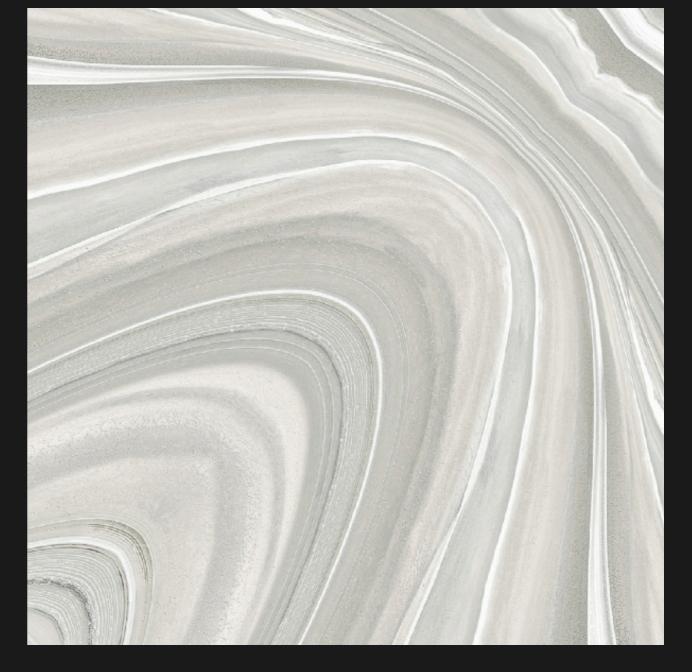





CRAYOL GREY

Size : **600x600mm**

Finish: GLOSSY

FEATURES

























CRIMSON ART

Size : **600x600mm**

Finish: GLOSSY

FEATURES



EASY AINTENANCE



DIMENSIONAL STABILITY



HIGH STRENGTH



WATER RESISTAN















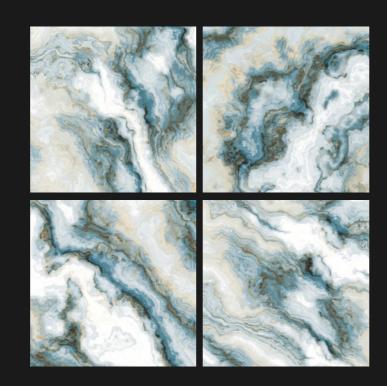



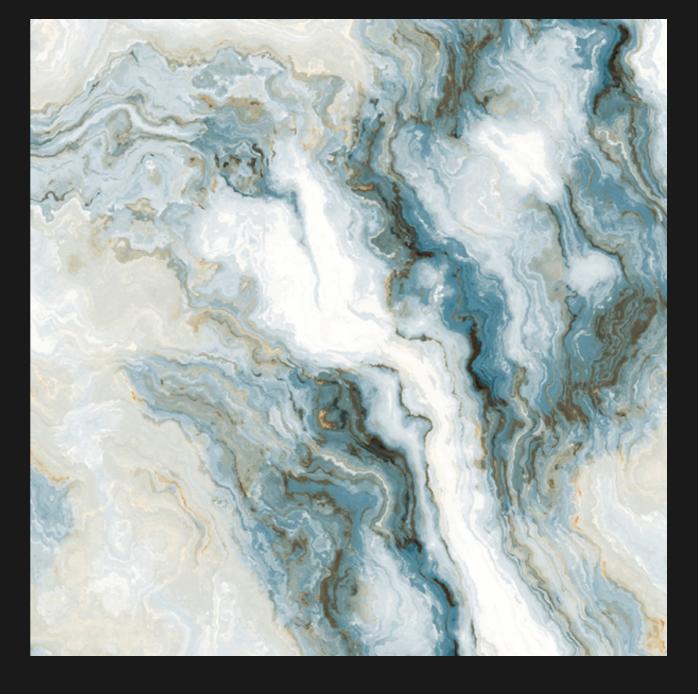





CRYSTA GOLD

Size : **600x600mm**

Finish: GLOSSY

FEATURES



EASY DI INTENANCE



HIGH STRENG



WATER RESISTAN




EMICAL






FIRE RESISTANT



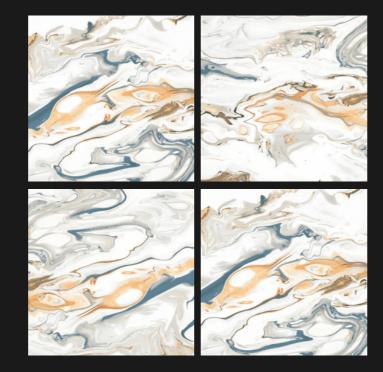



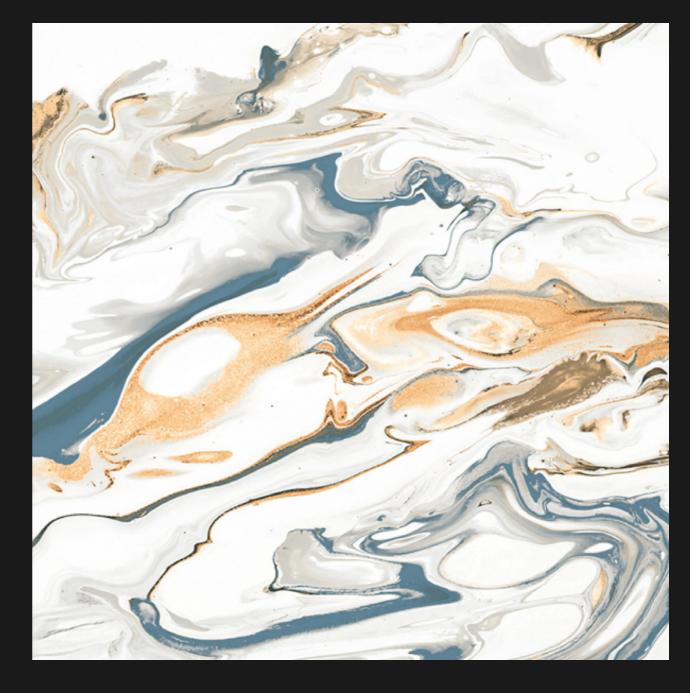



FOSSIL SATVARIYO

Size: 600x600mm

Finish: GLOSSY































FUSION MULTI

Size : **600x600mm**

Finish: GLOSSY

FEATURES
















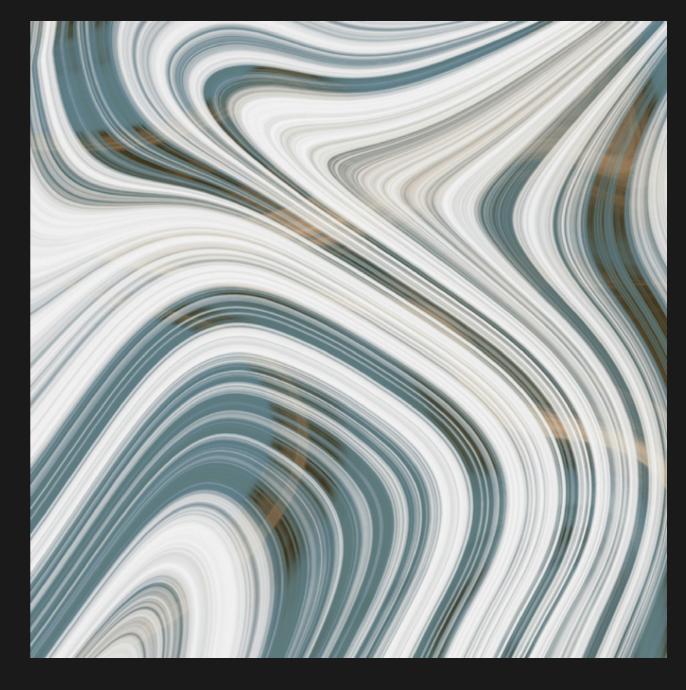



GREEN DARK

Size: 600x600mm

Finish: GLOSSY



























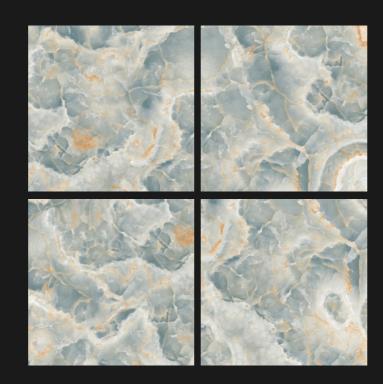

Random: 05

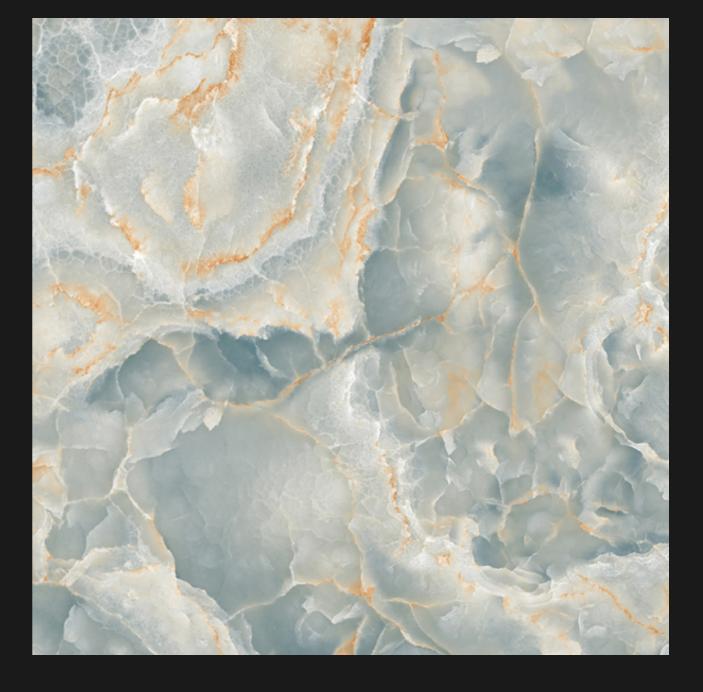





LISTA WHITE

Size : **600x600mm**

Finish: GLOSSY























NUEVA GREEN

Size: 600x600mm

Finish: GLOSSY

FEATURES































PANTHER AQUA

Size: 600x600mm

Finish: GLOSSY






















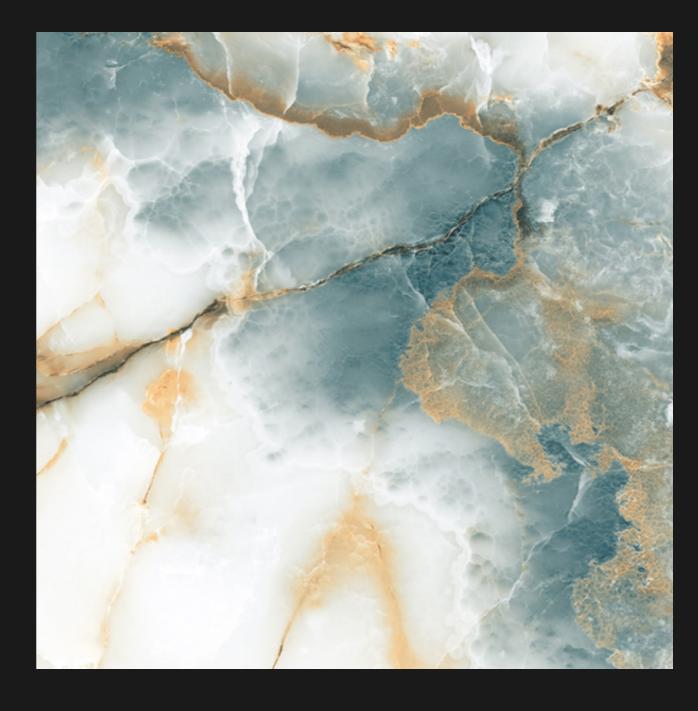



PELICAN GREEN

Size: 600x600mm

Finish: GLOSSY































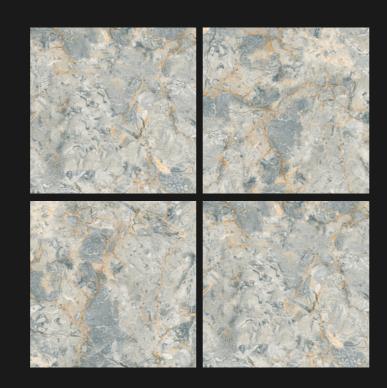









PRIZA WHITE

Size : **600x600mm**

Finish: GLOSSY
























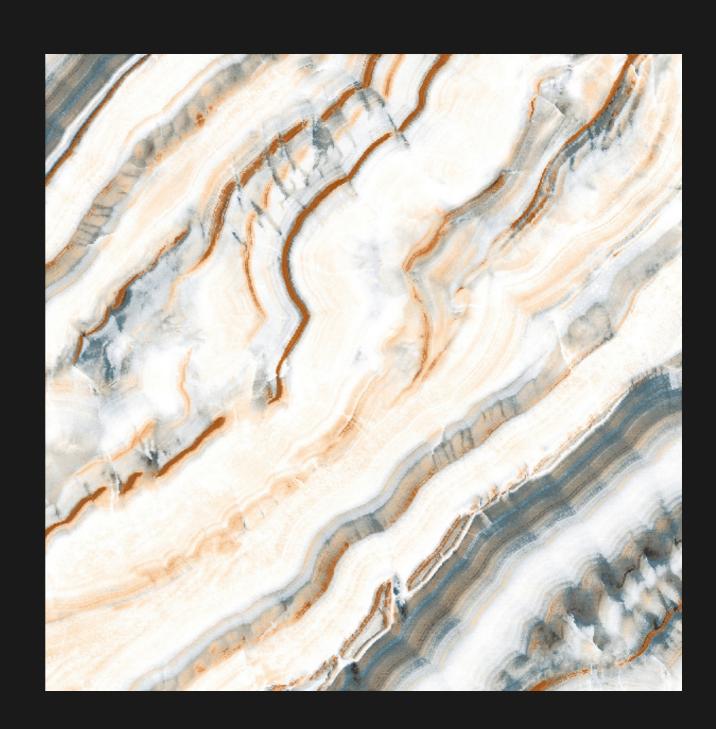



SKYLAR SATVARIO

Size: 600x600mm

Finish: GLOSSY























HYGIENIC SURFACE





TERRA MULTI

Size : **600x600mm**

Finish: GLOSSY

FEATURES





DIMENSIONAL
















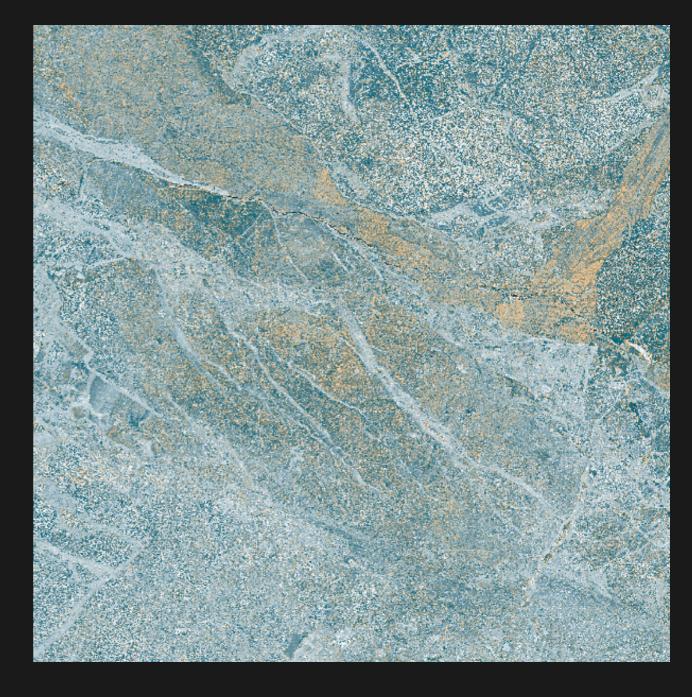



TRION BLUE

Size: 600x600mm

Finish: GLOSSY





























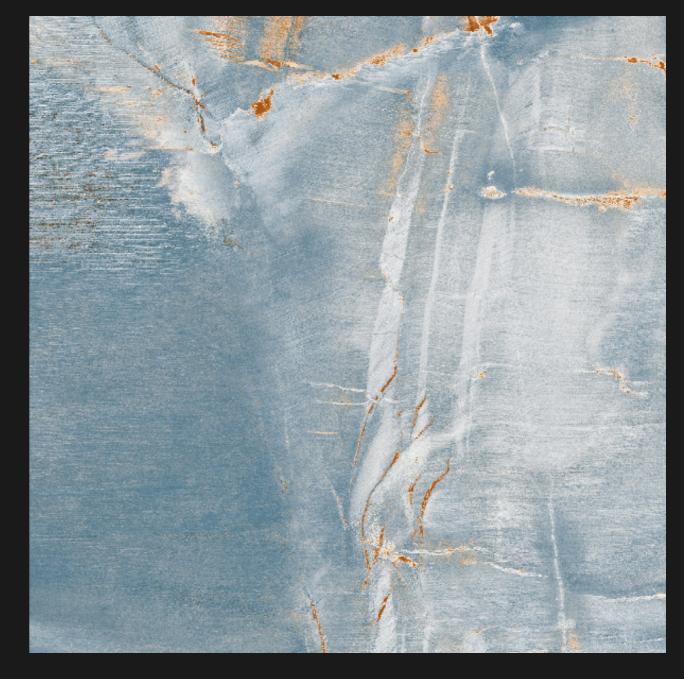



TECHNOLOGY & AFFILIATIONS











OUR CERTIFICATE











TILES INSTALLATION



Special Laying Instruction:

Tiles Spacers

We always recommend to use the Tile Spacer for laying of different tiles as per its type and size. Tile Spacer is specially designed to create a uniform gap between tiles, this results in proper alignment throughout the tiling area. It is available in different width sizes starting from 2mm width to 10 mm width.

Features and Benefits:

- Spacers accommodate the movements due to thermal variations and different loads
- When filled with the right grout material, they can efficiently reduce the free water flow / leakage through the joints and also make the joints anti fungal and anti bacterial
- With spacers, we can create uniform designs and pattern
- Improved aesthetics and dimensional stability to the entire tile/ stone assembly
- It ensures longer life span of tile installation

TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006/ EN14411 GROUP Bla	TILES VALUE	TEST METHOD
REGULATORY PROPERTIES			
1) Deviation In Length & Width	±0.50%	±0.10%	ISO-10545-2
2) Deviation In Thickness	+5.00%	±2.00%	ISO-10545-2
3) Straightness Of Sides	±0.50%	±0.10%	ISO-10545-2
4) Rectangularity	±0.50%	±0.10%	ISO-10545-2
5) Surface Flatness	±0.50%	±0.10%	ISO-10545-2
6) Color Differences	Unaltered	No Change	ISO-10545-16
7) Glossiness	As Per Manufacturer	Min. 70%	Glossometer
STRUCTURAL PROPERTIES			
1) Water Absorption	≤0.50%	<0.05%	ISO-10545-3
2) Apparent Density	>2.00 gm/cc	>2.28 gm/cc	DIN 51082
MASSIVE MECHANICAL PROPERTI	ES		
1) Flexural Modulus Of Rupture	Min. 35N/mm²	Min. 40N/mm²	ISO-10545-4
2) Flexural Breaking Strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
3) Impact Resistance	As Per Manufacturer	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTI	ES		
1) Deep Abrasion Resistance	Max. 175mm³	Max. 132mm ³	ISO-10545-6
2) Moh's Hardness	Min. 6	8*	EN101
THERMO HYGROMETRIC PROPER	TIES		
1) Frost Resistance	No Damage	Frost Proof	ISO-10545-12
2) Thermal Shock Resistance	No Damage	No Damage	ISO-10545-9
3) Moisture Expansion	Nil	Nil	ISO-10545-10
4) Thermal Expansion	Max 9.0x106	Max 6.5x10 -	ISO-10545-8
CHEMICAL PROPERTIES			
1) Chemical Resistance	No Damage	No Damage	ISO-10545-13
2) Stain Resistance	Resistant	Resistant	ISO-10545-14
SAFETY PROPERTIES			
1) Slip Resistance(friction Co Efficient)	>0.40	>0.40	ISO-10545-17

PACKING DETAIL

Size	600x600mm	
Thickness (approx.)	8 mm	
Pieces / Box	4 pcs.	
Area / Box	1.44 sq.mtr.	
Wt./Box (approx.)	26-27 Kgs.	