

*Collection of*  
**PORCELAIN GLAZED  
VITRIFIED TILES**

**600 x 1200mm**



**SURFACE**

● SATIN

● ROCKER

● HIGH GLOSS

● GLOSSY

● MATT

● DECORE



# CHARACTOR IDENTIFICATION



Floor Application



Wall Application



Rectified



Position



Glossy



Semi Polished



Matt



No. of variation in Pattern





## USER GUIDE

600x1200mm


300x600mm

600x600mm



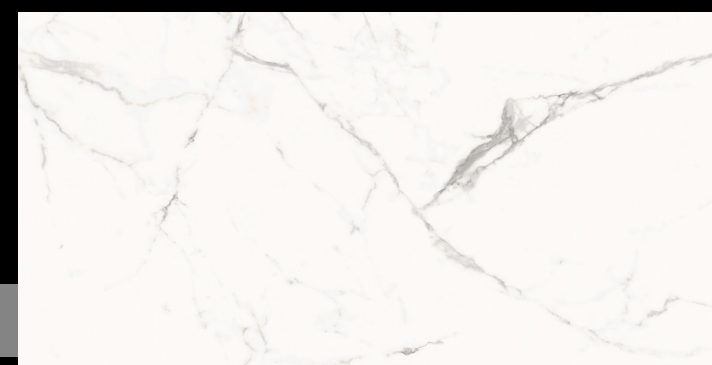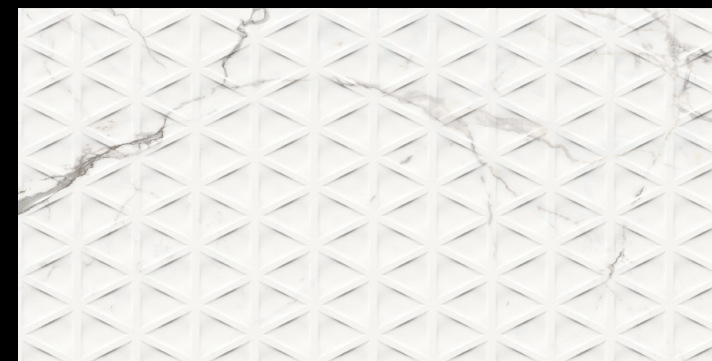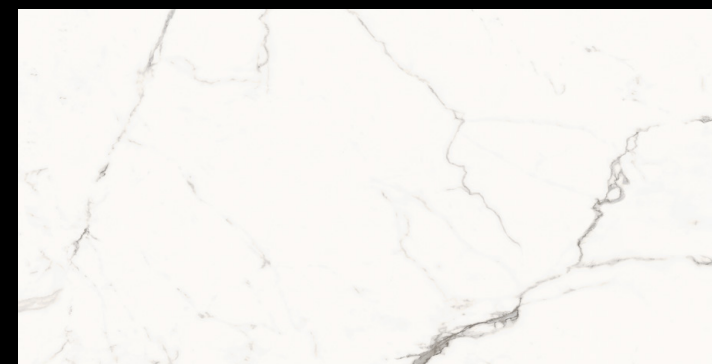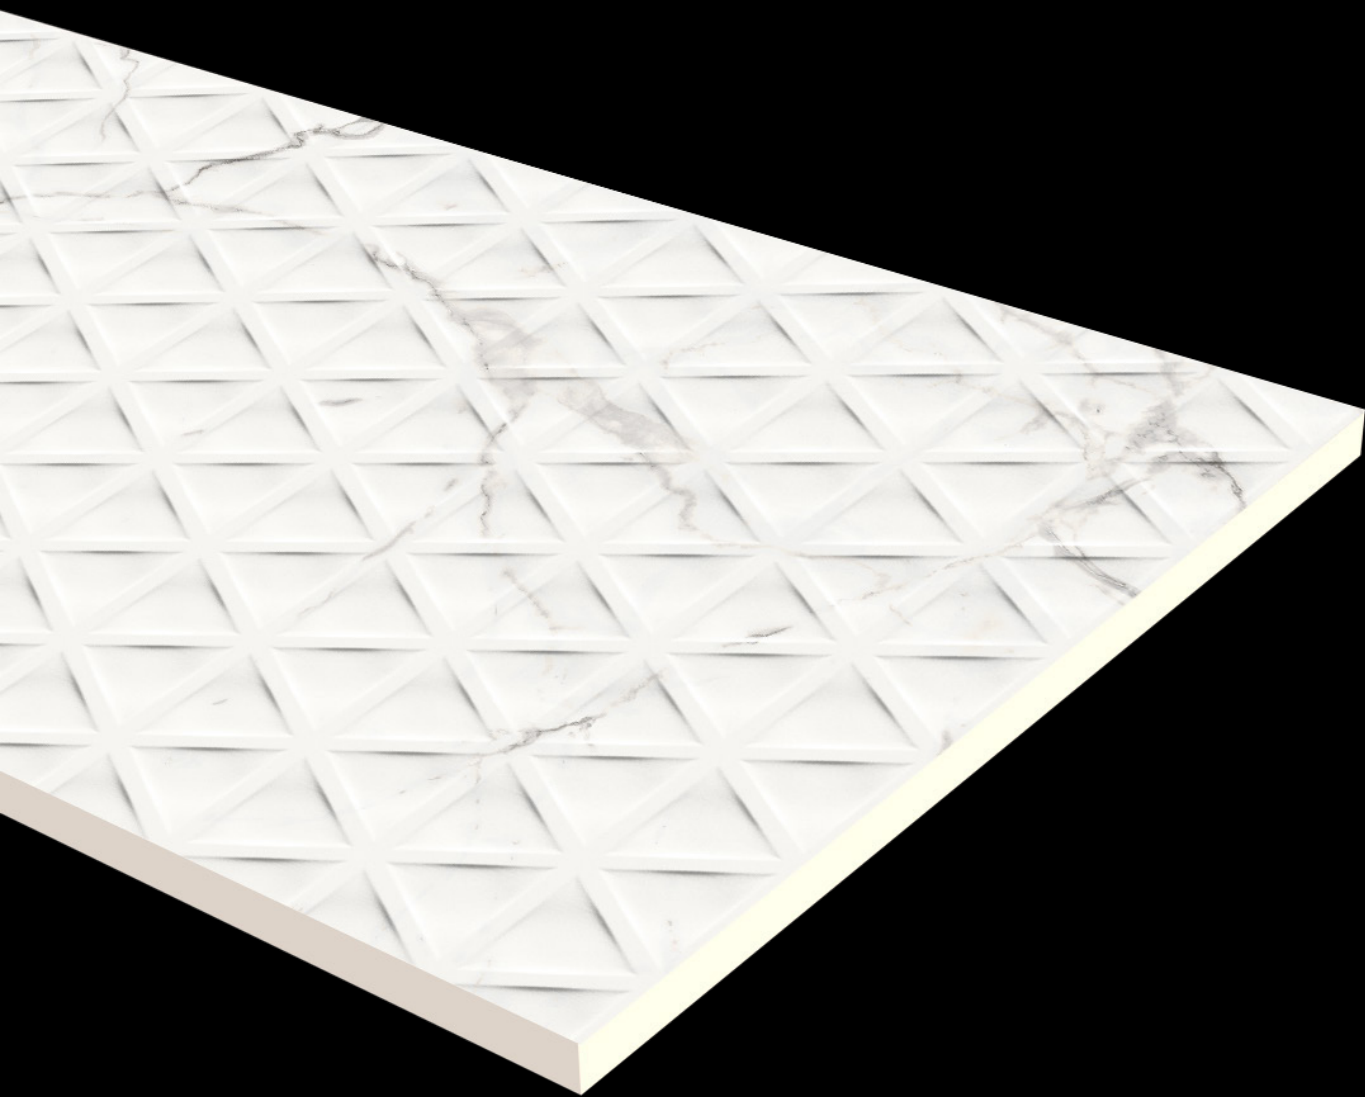

1011



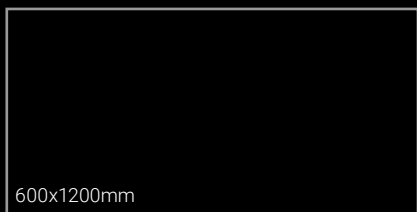


Decor  
1011  
Satin


Base  
1011  
Satin





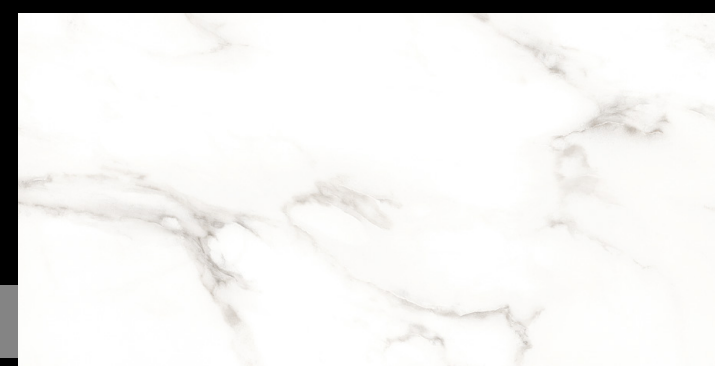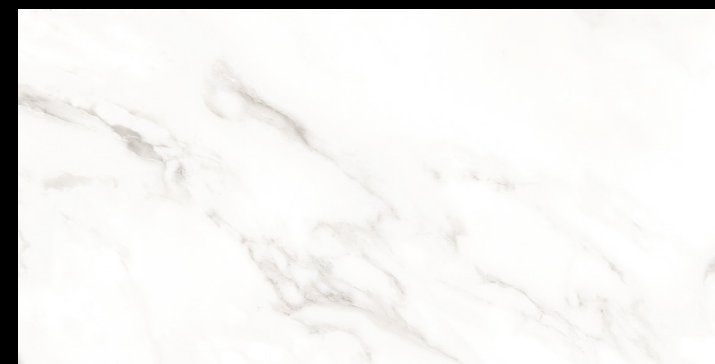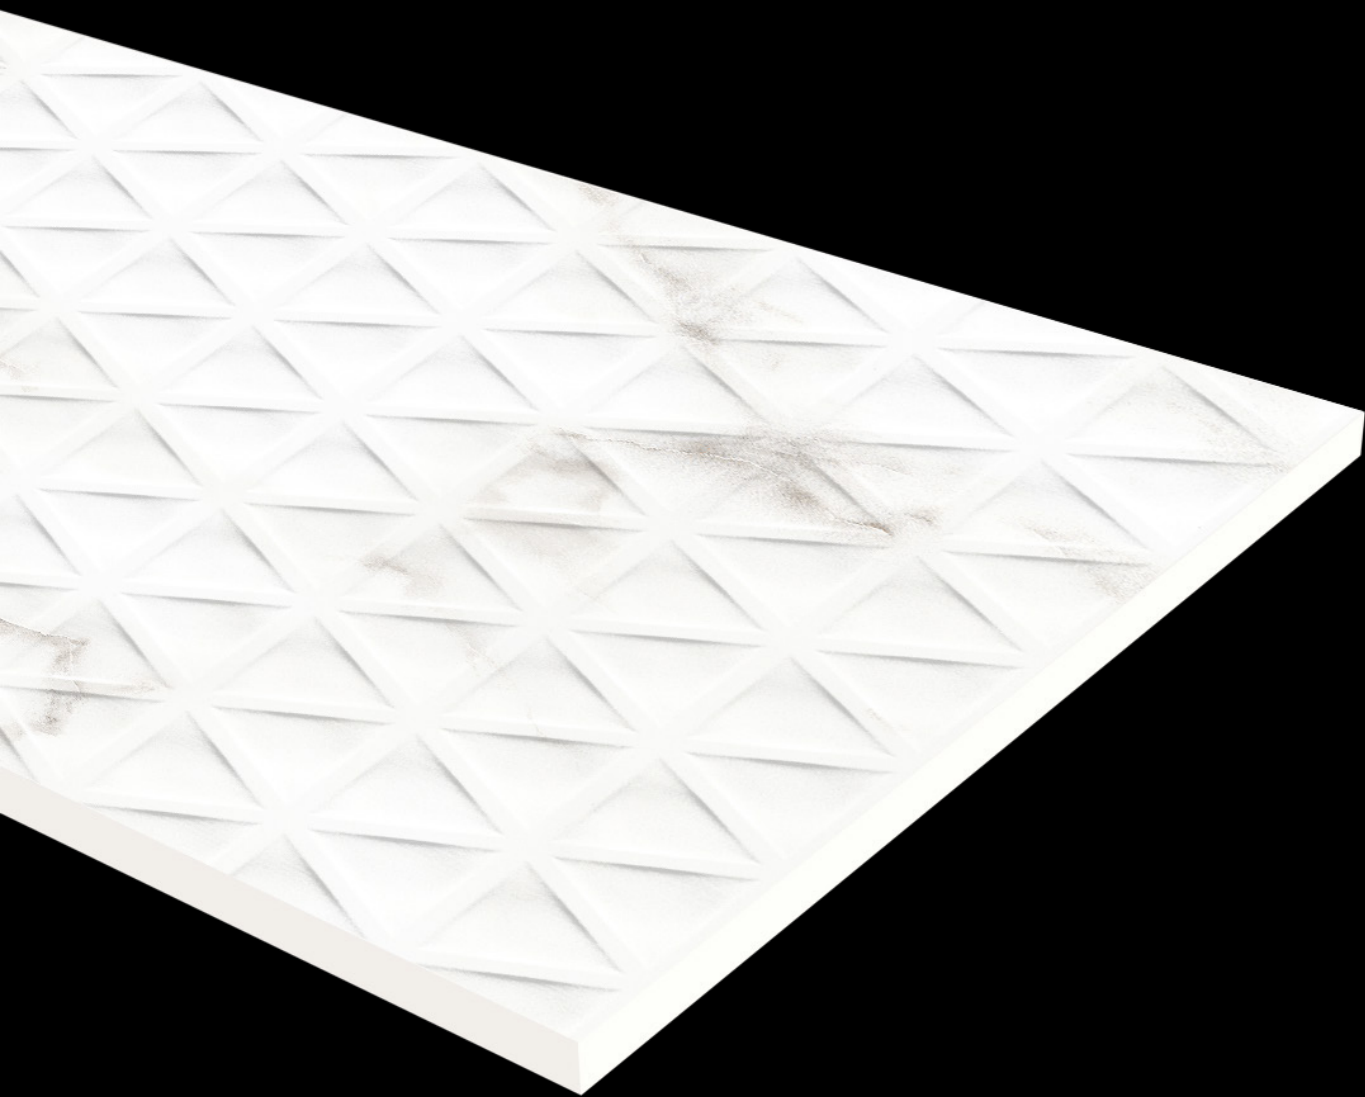

1014



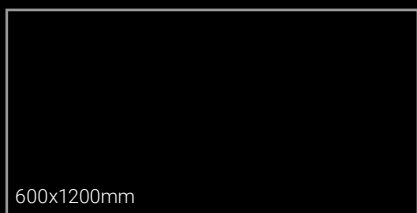


600x1200mm


Decor  
1014  
Satin

Base  
1014  
Satin



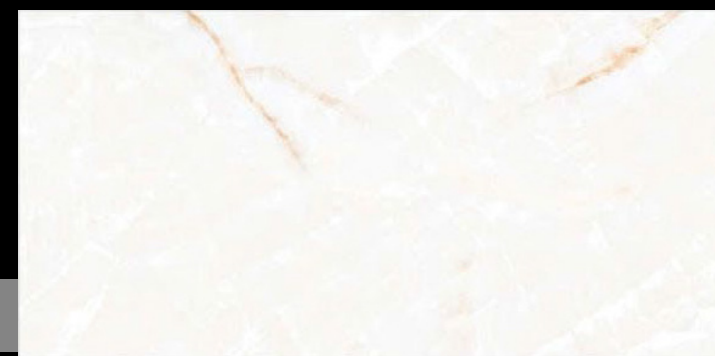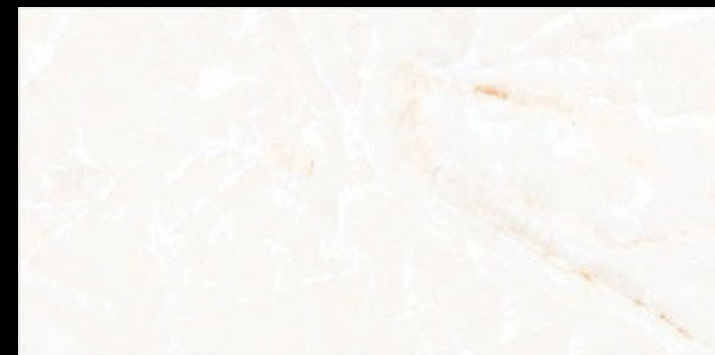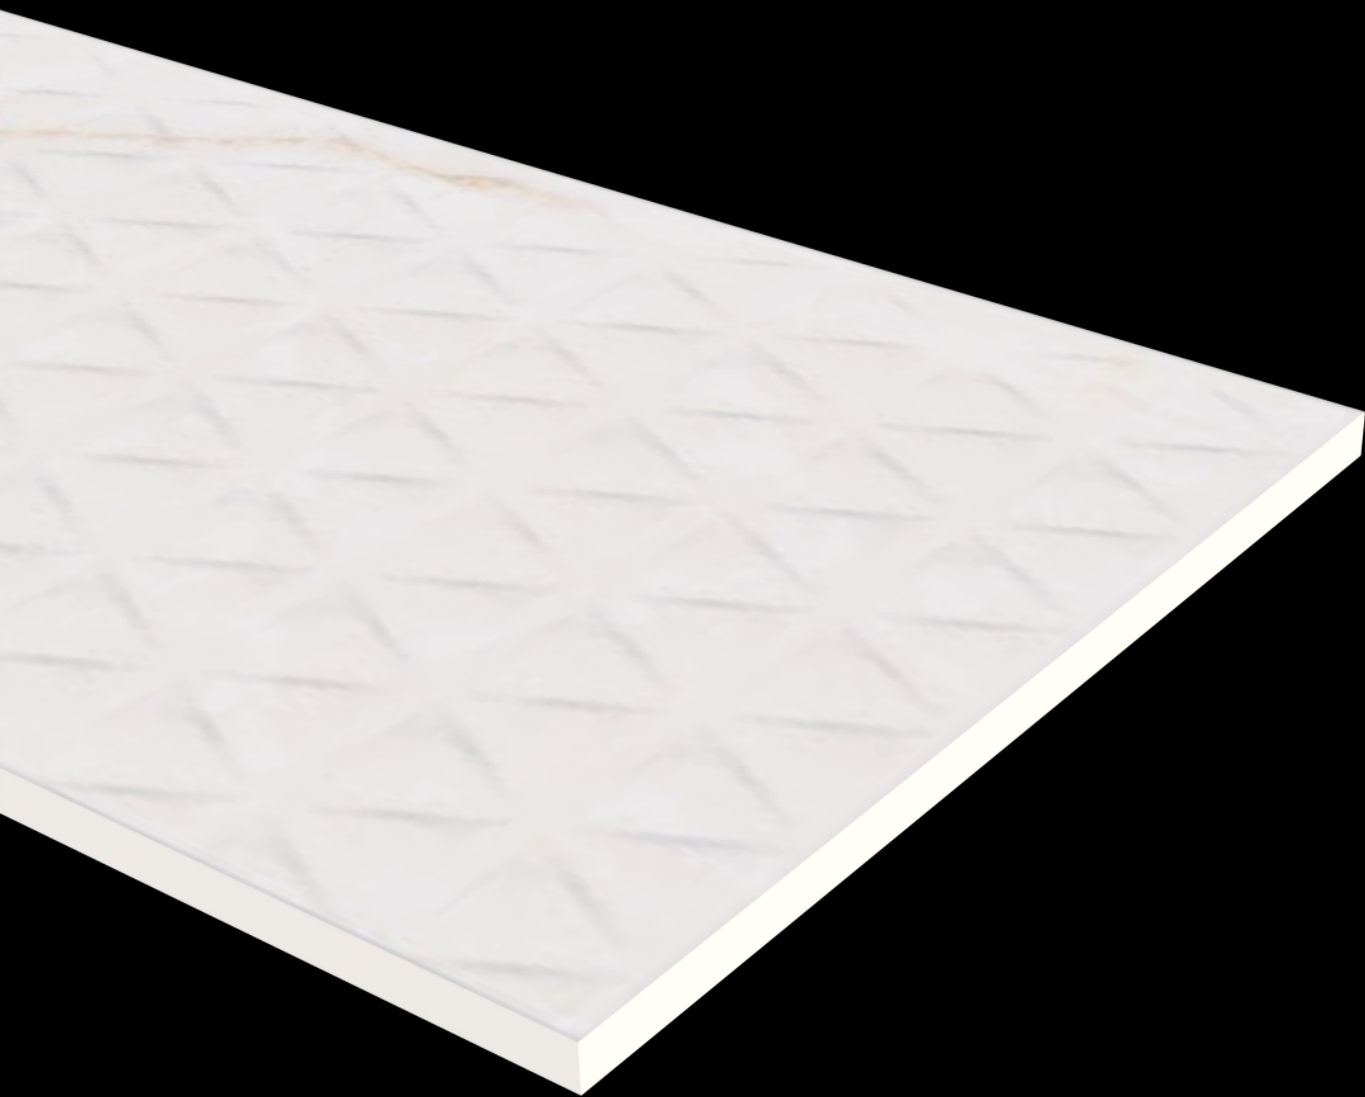

1006

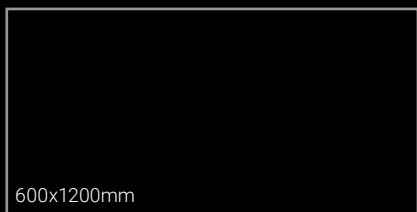

600x1200mm



Decor  
1006  
Satin

Base  
1006  
Satin








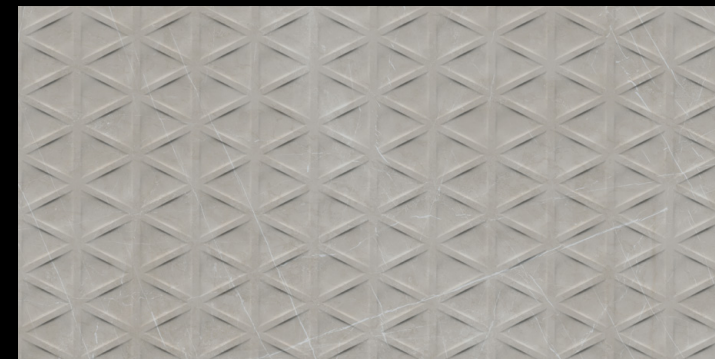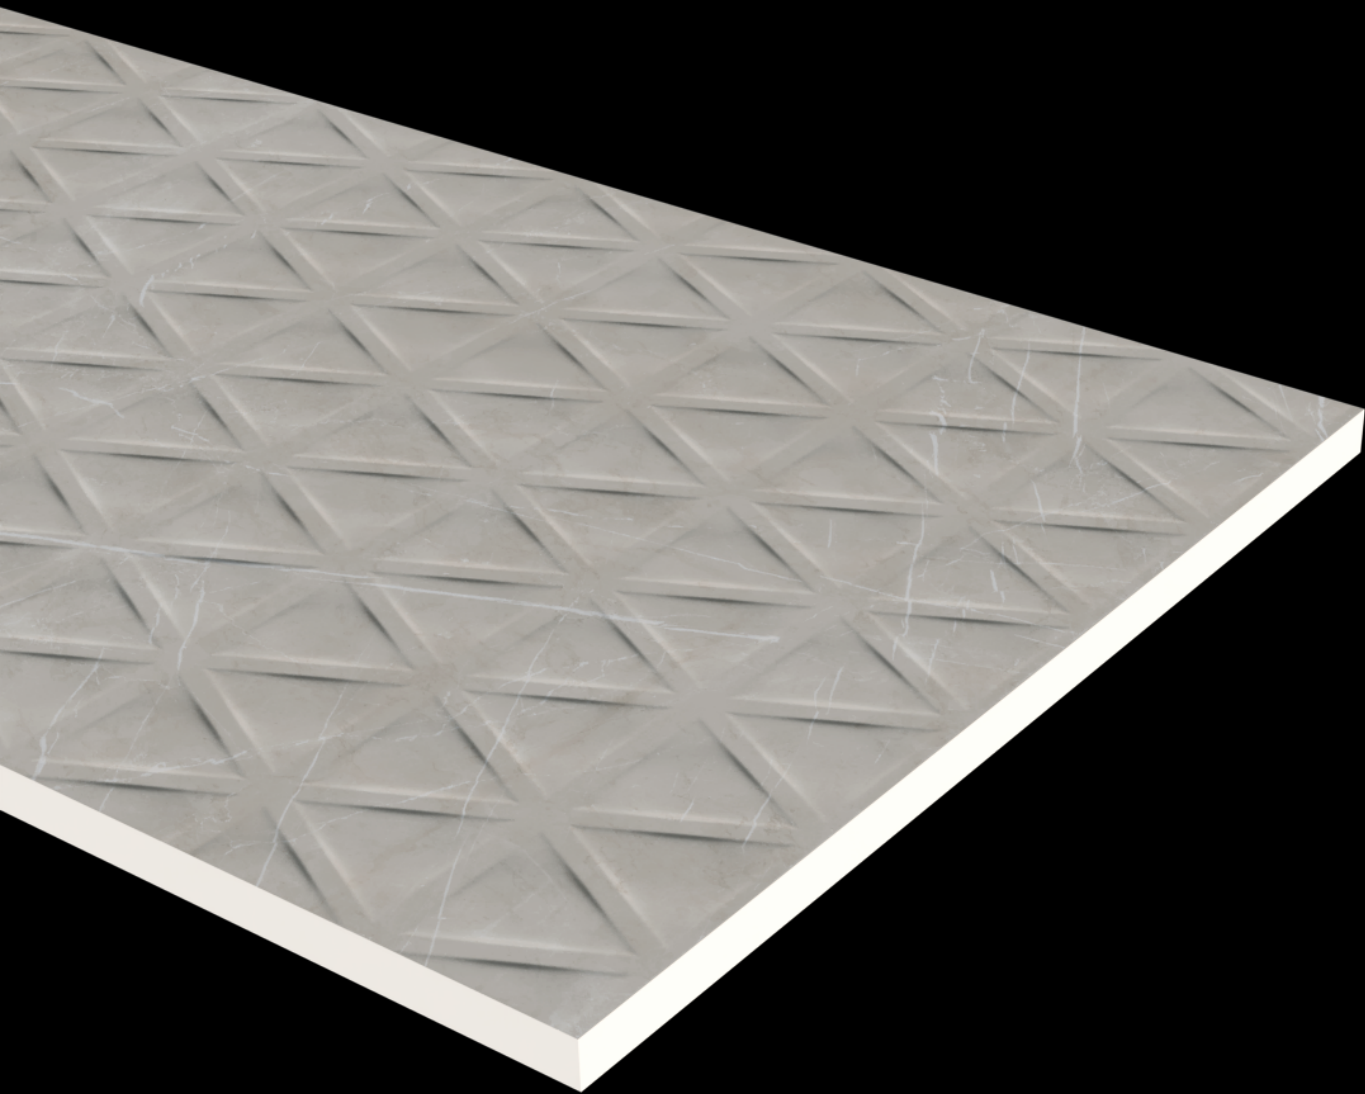



1002

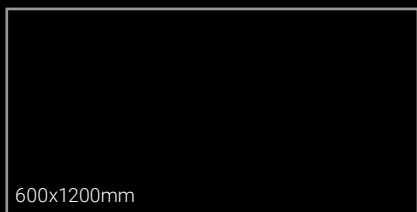


Decor  
1002  
Satin

Base  
1002  
Satin



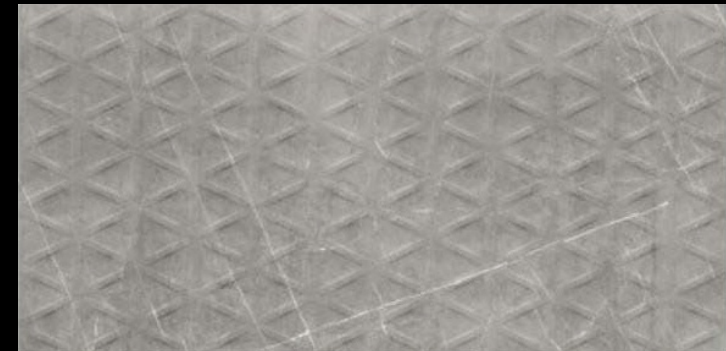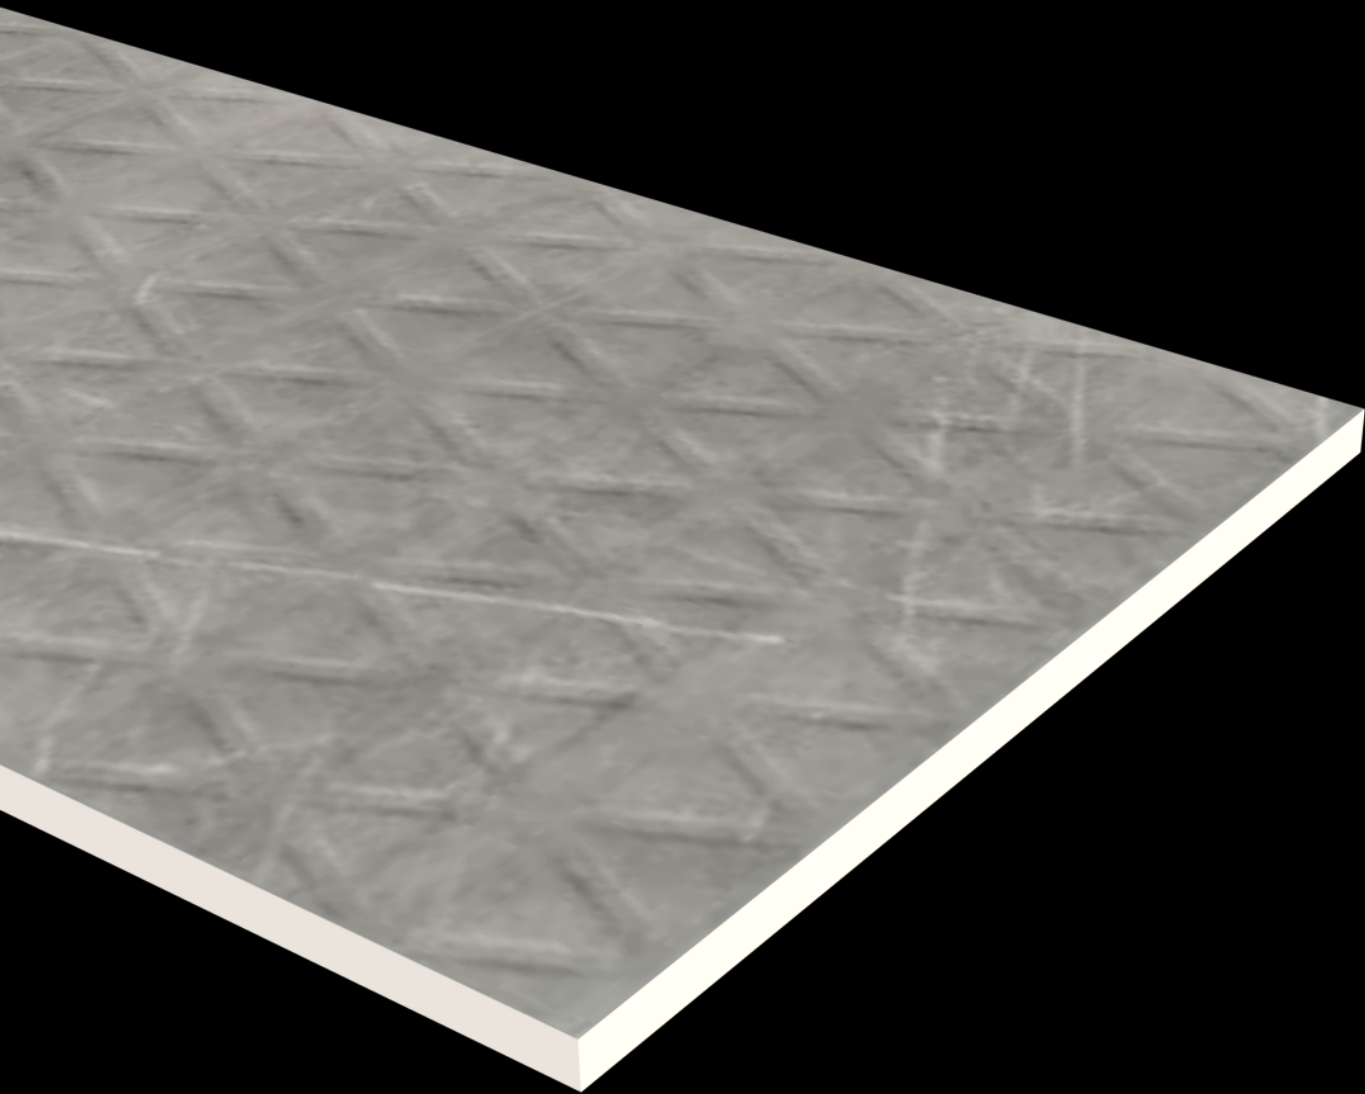

1001

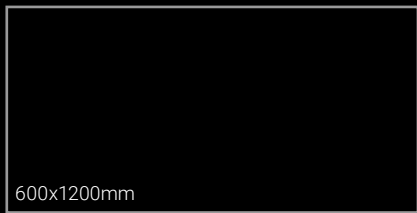



600x1200mm

Decor  
1001  
Satin


Base  
1001  
Satin





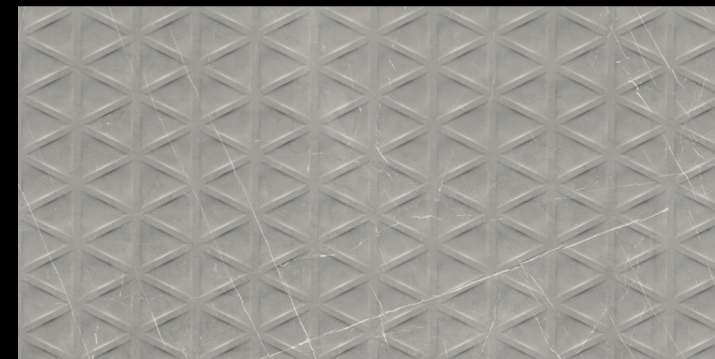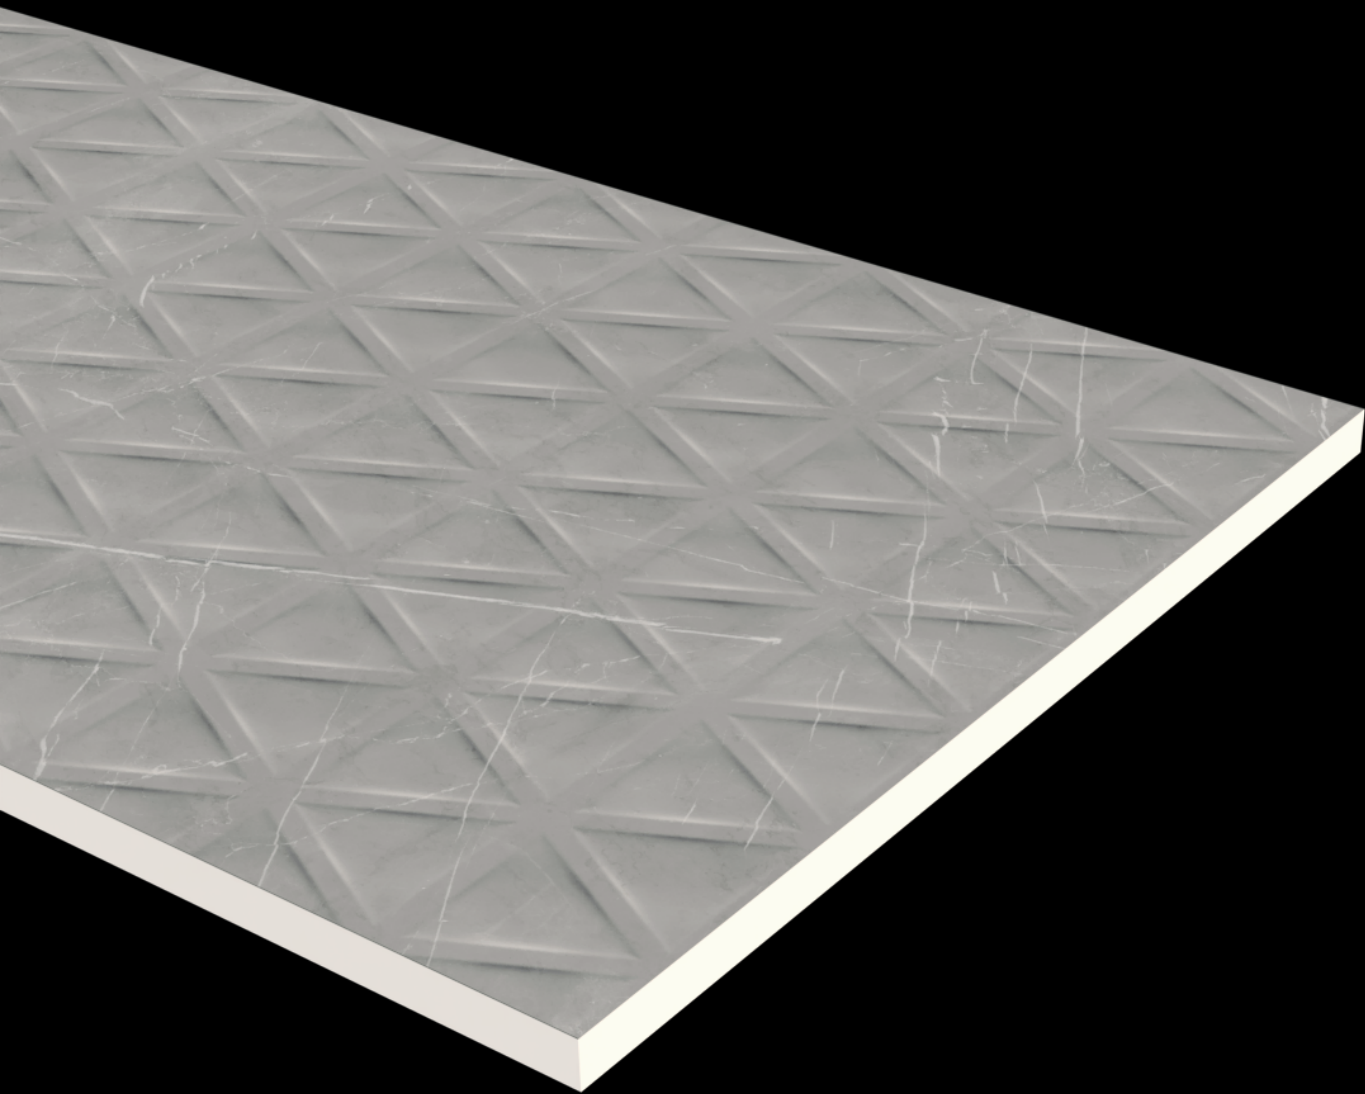

1004

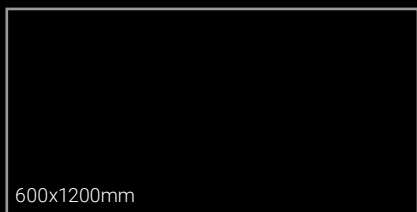

Decor  
1004  
Satin

Base  
1004  
Satin







Double vanity with two white ceramic sinks on a thick, natural wood countertop. The vanity is supported by a metal bracket. Two rectangular mirrors with dark wood frames are mounted on the wall above the sinks. The wall behind the vanity has a textured, geometric pattern.

A walk-in shower with a glass door and a dark wood frame. The shower has a rainfall showerhead and a handheld showerhead. The floor is a light-colored, textured mat. The wall behind the shower has the same textured, geometric pattern as the rest of the bathroom.


A wooden towel rack with a dark wood frame. A white towel with a black pattern is hanging on it. The towel rack is positioned against the wall with the textured, geometric pattern.

A freestanding white bathtub. In front of the tub is a small, round, two-tiered side table with a dark top and a gold-colored metal frame. On the top tier, there is a small potted plant and two bottles of bath products. On the bottom tier, there is a bar of soap. The wall behind the tub is made of large, light-colored tiles.

Three spherical pendant lights hanging from the ceiling. Each light has a white globe and a dark horizontal band. The lights are positioned above the bathtub area.

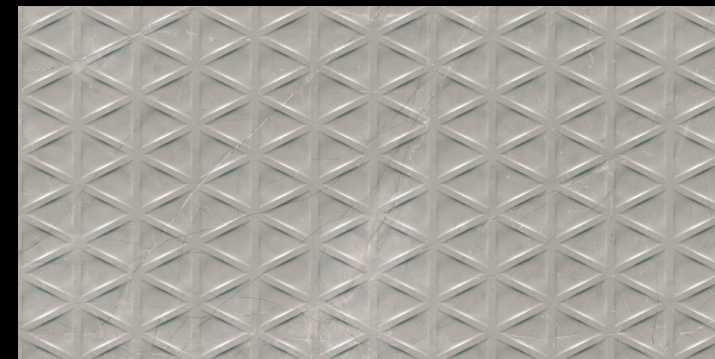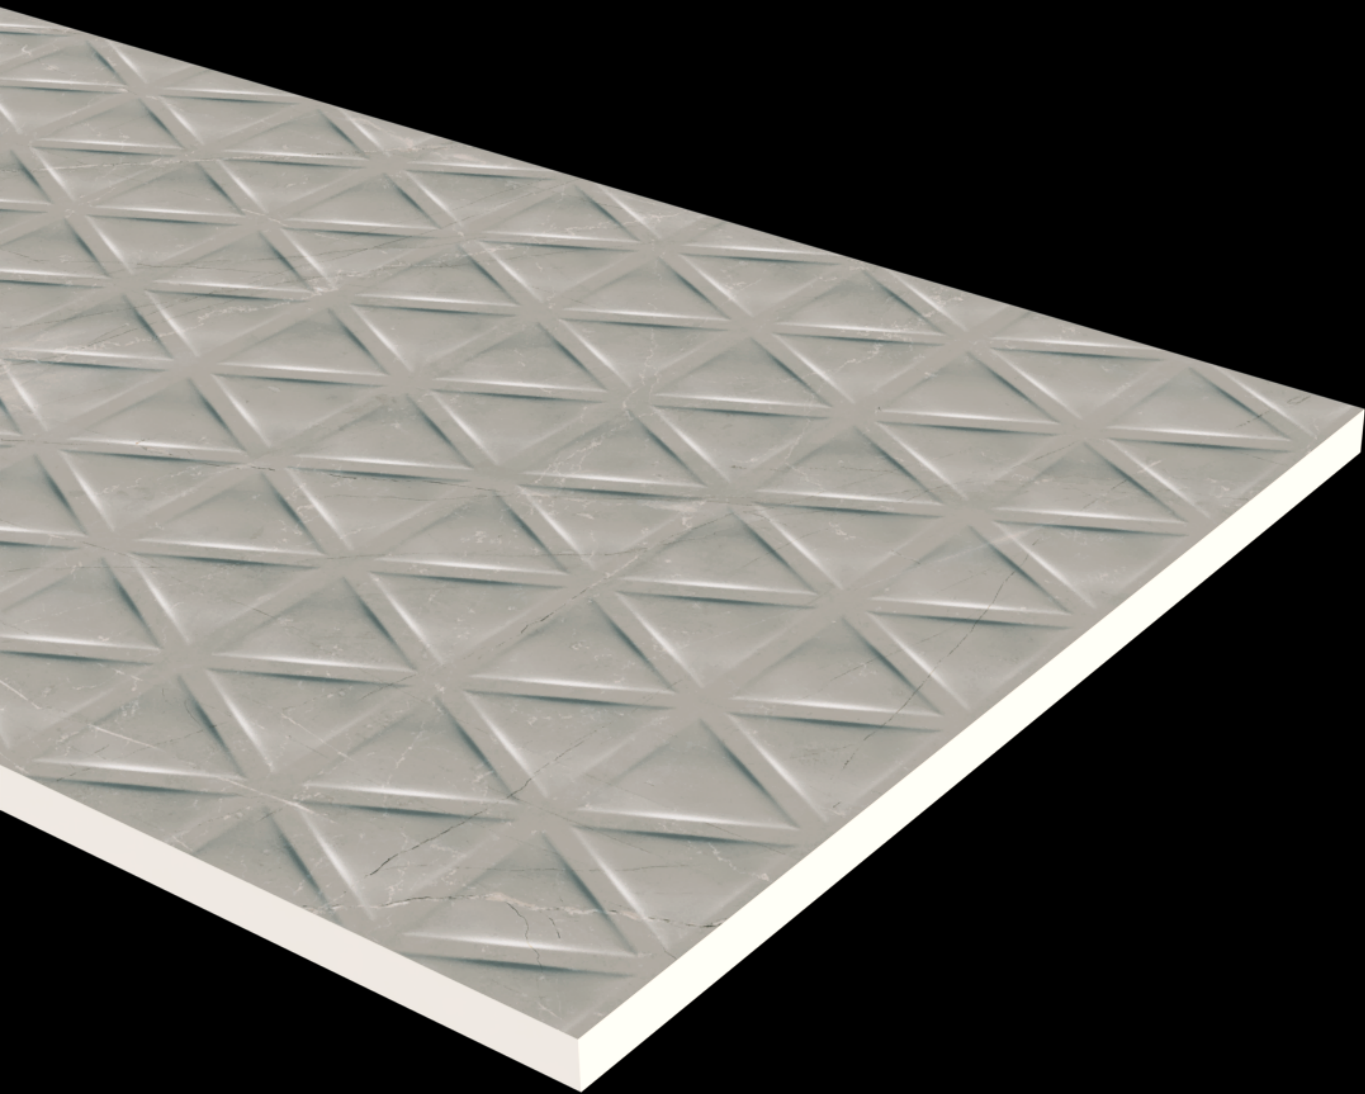


1015

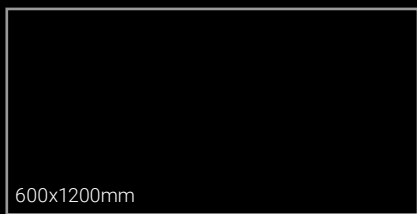


Decor  
1015  
Satin

Base  
1015  
Satin



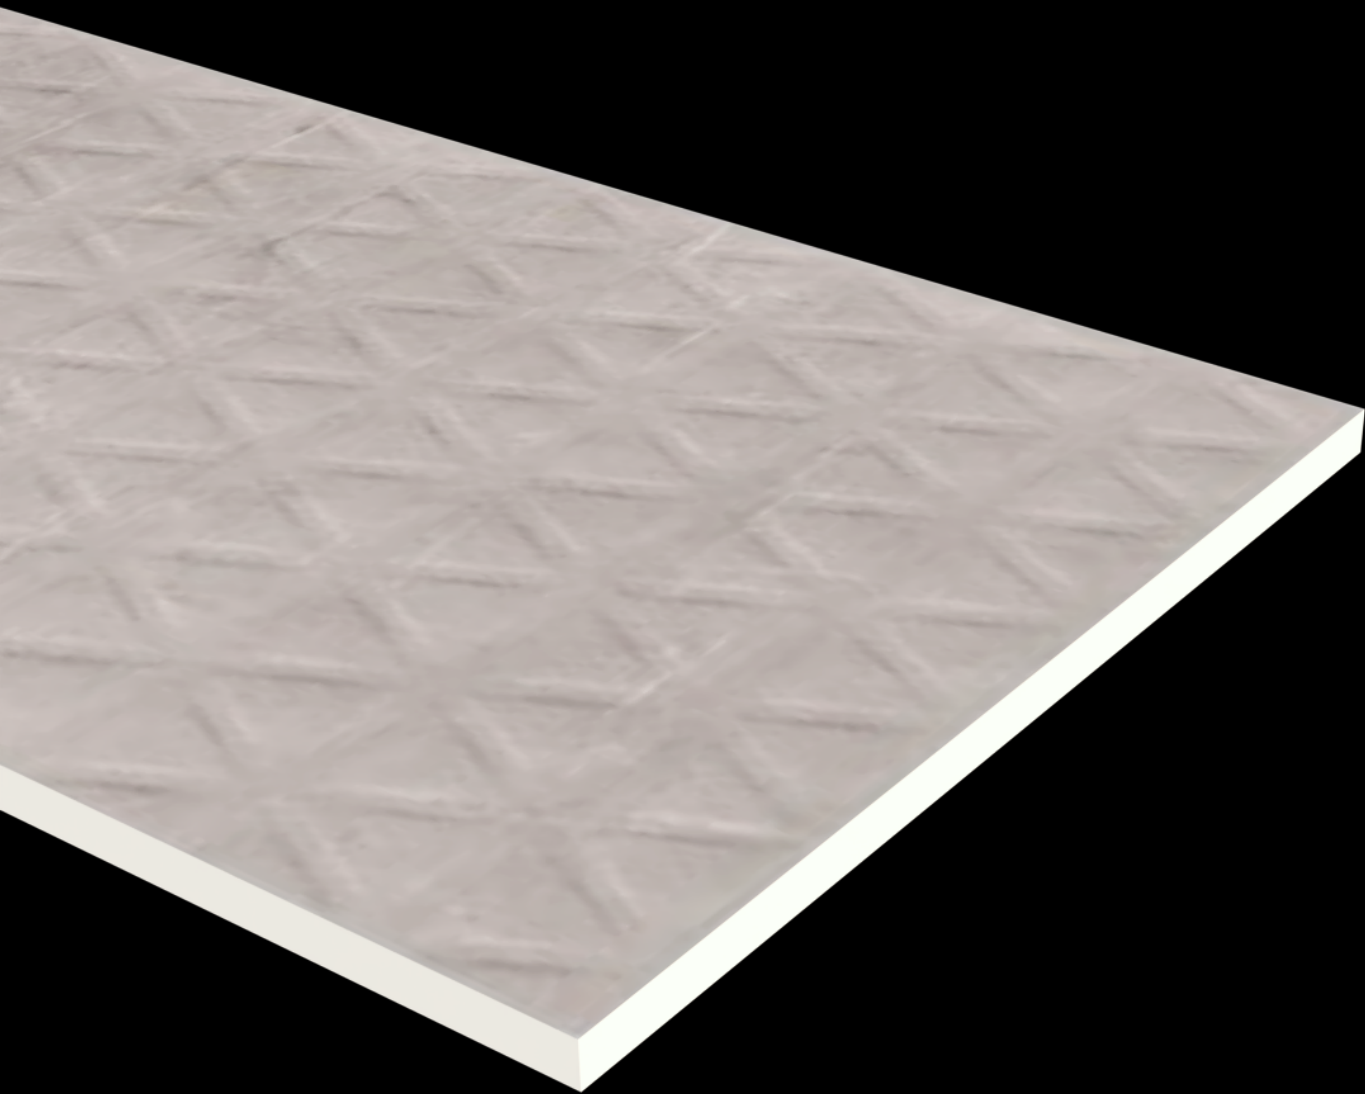

1018


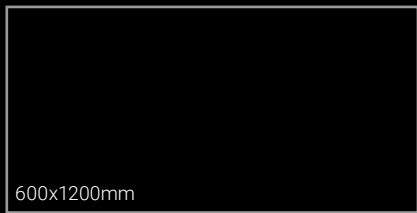


Decor  
1018  
Satin


Base  
1018  
Satin





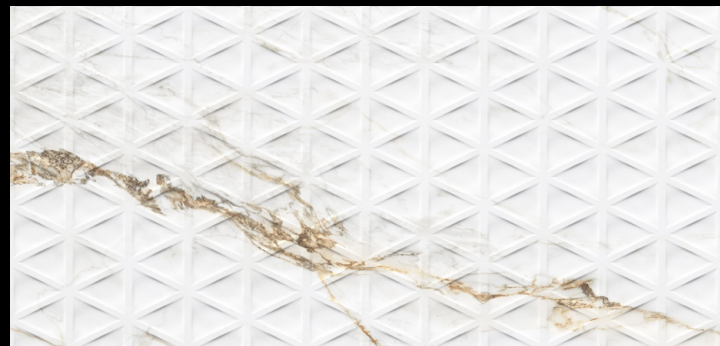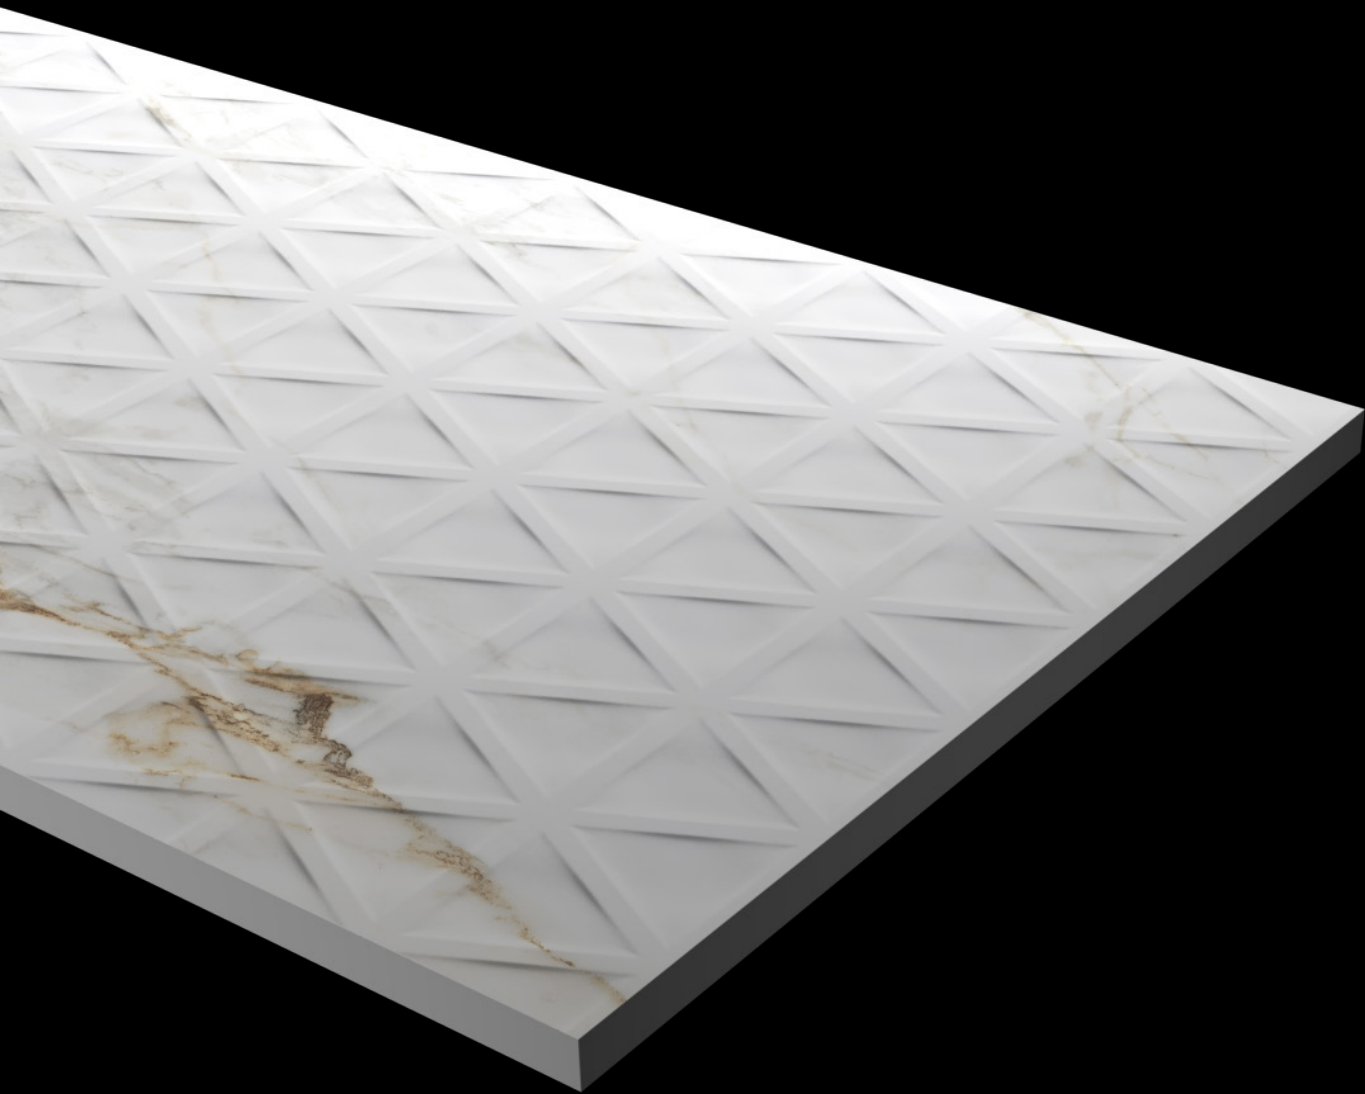

1020

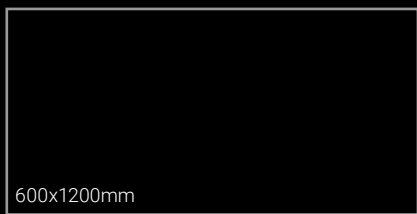



600x1200mm

Decor  
1020  
Satin


Base  
1020  
Satin





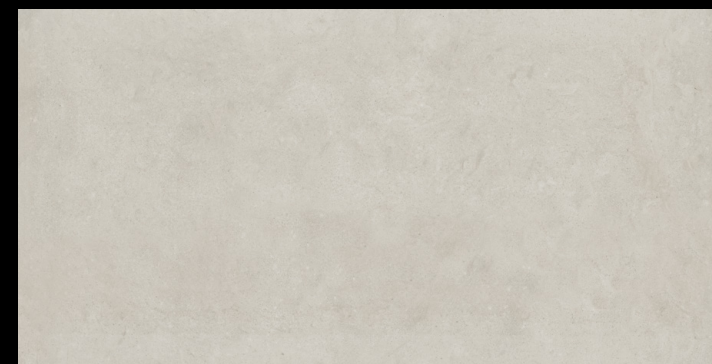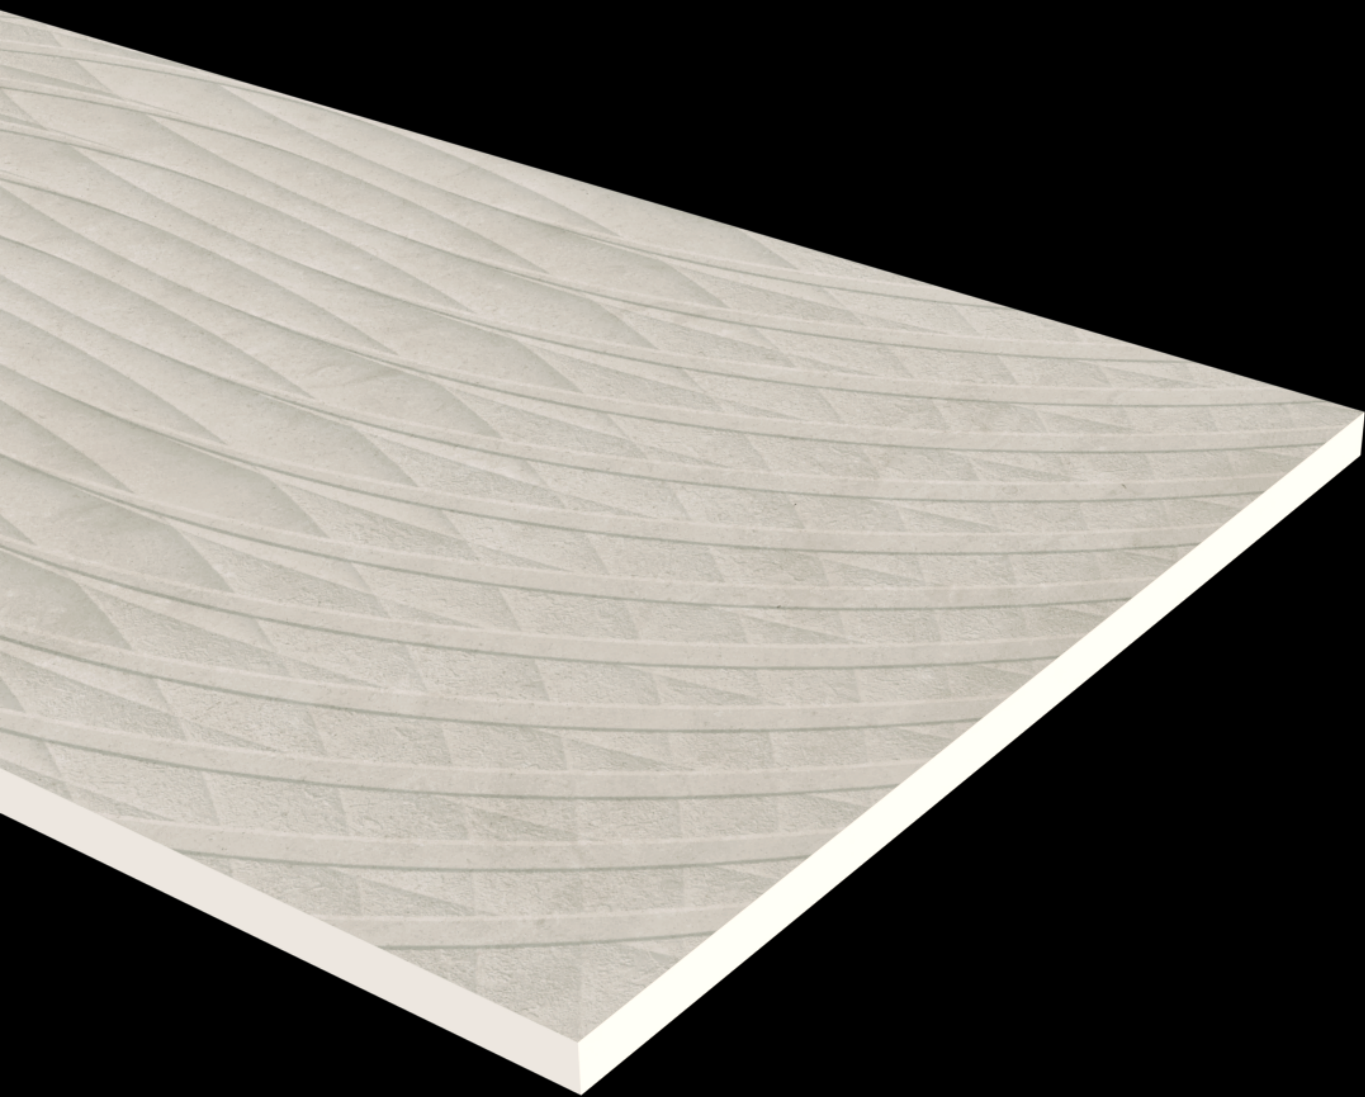

1009

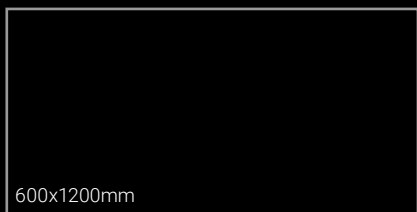

Decor  
1009  
Satin

Base  
1009  
Satin




# Lotus Hotels

INTERNATIONAL





1012

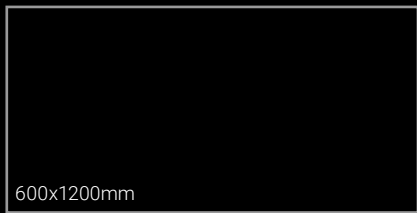


Decor  
1012  
Satin

Base  
1012  
Satin





1013

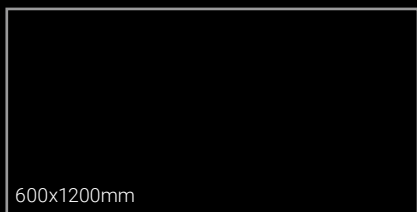

Decor  
1013  
Satin


Base  
1013  
Satin






12080PN



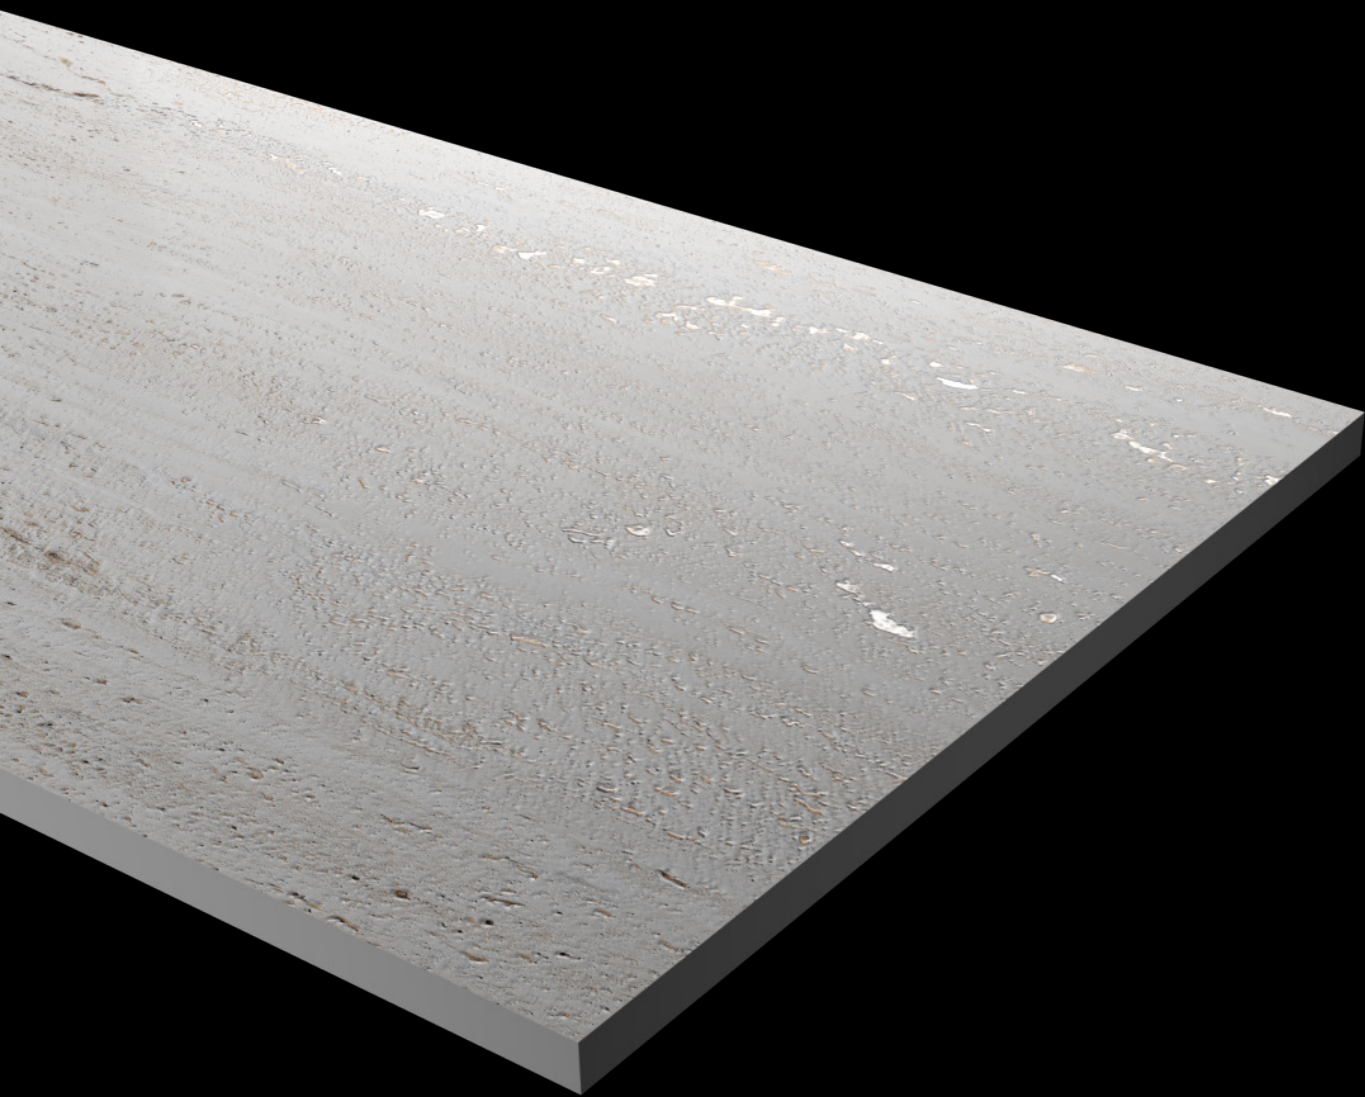

12081PN

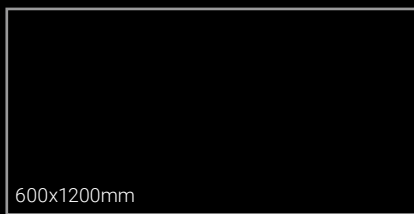



# TECHNICAL SPECIFICATION

PROPERTIES	TEST EN: 14411 : 2016 (GROUP BLA.) ANNEX - G STANDARD AS PER ISO 13006 : 2018	MARBILANO RESULT	TESTING METHOD
<b>Dimension and Surface Quality</b>			
Deviation in Length	± 1 mm	0.00 - 0.10mm	EN ISO 10545 - 2
Deviation in Width	± 1 mm	0.00 - 0.10mm	EN ISO 10545 - 2
Deviation in Thickness	± 0.5mm	0.00 - 0.18mm	EN ISO 10545 - 2
Straightness of Sides	± 0.8mm	0.12 - 0.14mm	EN ISO 10545 - 2
Rectangularity	± 0.8mm	0.14 - 0.16mm	EN ISO 10545 - 2
Surface Flatness	± 1.8mm	0.00 - 0.15mm	EN ISO 10545 - 2
Surface quality	95%	100% free from defects	EN ISO 10545 - 2
<b>Physical Property</b>			
Water Absorption %	≤ 0.500%	0.020%	EN ISO 10545 - 3
Breaking Strength N	≥ 1300	2255.52N	EN ISO 10545 - 4
Modulus of Rupture (MOR) N/mm <sup>2</sup>	35	50.34N/mm <sup>2</sup>	EN ISO 10545 - 4
Resistance to surface abrasion		PEI Class - IV 2100 Revolution pass	EN ISO 10545 - 7
Coefficient of Linear Thermal Expansion	9 x 10 <sup>-6</sup> Max	5.23 x 10 <sup>-6</sup>	EN ISO 10545 - 8
Thermal Shock Resistance	10 cycle Min	confirm	EN ISO 10545 - 9
Crazing Resistance	No crazin in two cycle	confirm	EN ISO 10545 - 11
Moisture Expansion (mm/mm)	0.02 mm/m Max.	0.00 mm/m Max.	EN ISO 10545 - 10
Impact Resistance	0.55 Min.	0.58	EN ISO 10545 - 5
Scrach hardness of Surface (mohs scale)	5 moh's scal	5 moh's	IS 13630 - 13
Bulk density (g/cc)	2.2 Min.	2.2913 g/cc	EN ISO 10545 - 3
<b>Chemical Property</b>			
Resistance Stain	Min Class - 3	Min Class - 5	EN ISO 10545 - 14
Resistance to Low Concentration of Acid & Alkali	Min Class - GLC	Class - GLA	EN ISO 10545 - 13
Resistance to High Concentration of Acid & Alkali	Min Class - GHC	Class - GHA	EN ISO 10545 - 13
Resistance to house chemical	Min Class - GC	Class - GA	EN ISO 10545 - 13
Resistance to swimming pool salt	Min Class - GC	Class - GA	EN ISO 10545 - 13
Lead and Cadium Release	≤0.1 mg/dm <sup>2</sup>	0.00 mg/dm <sup>2</sup>	EN ISO 10545 - 15

